


Himalaya G12 Series 680-700W

132-cell Bifacial HJT Half Cell
Solar Module



HJT · G12
Heterojunction 210mm Cell

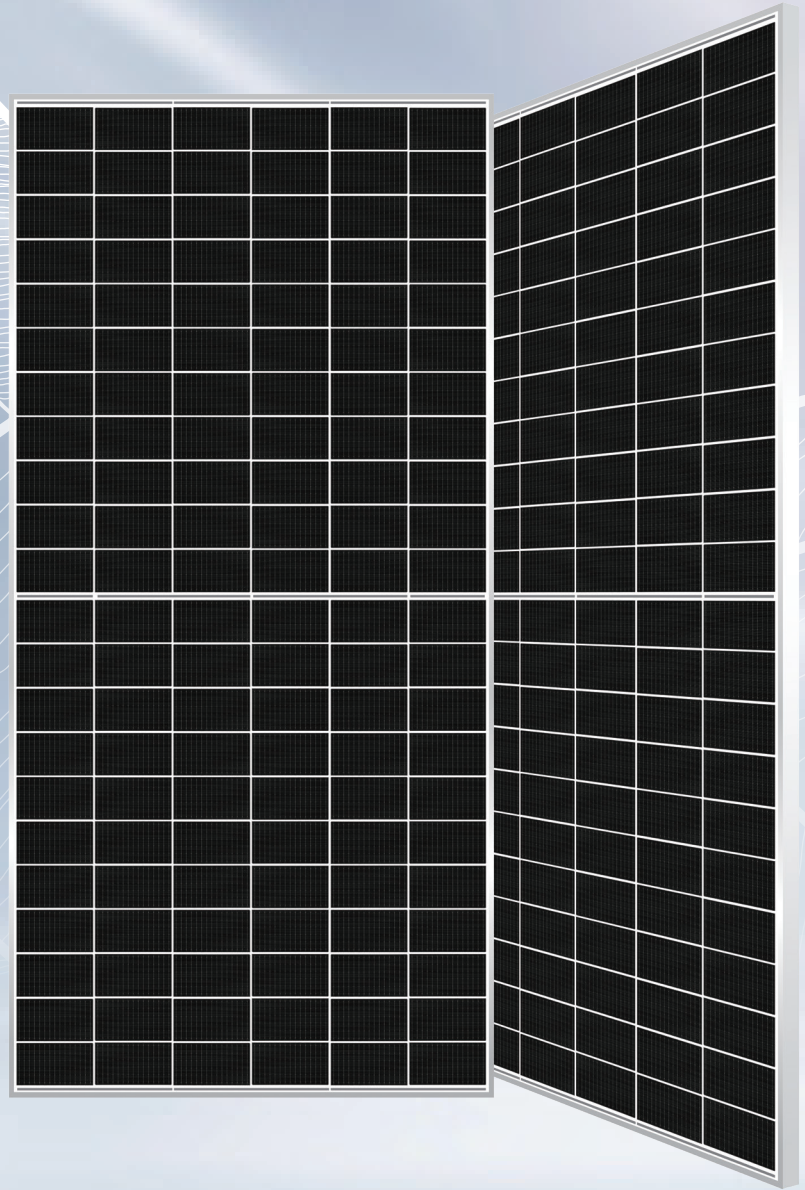

SMBB Half-Cut
Cell Technology



Up to 85% Bifaciality



PIB Technology*



Lower LCOE
Higher Return

WARRANTY

Product
Warranty

15
years

Linear
Power
Warranty

30
years



Scan&Download

*PIB technology is optional and will be confirmed by case.

The specification and key features described in this datasheet may deviate slightly and are not guaranteed. Anhui Huasun reserves the right to make any adjustment to the information described herein at any time without notice. Please always obtain the latest version of the datasheet which shall be duly incorporated into the binding contract made by the parties governing all transactions related to the purchase and sale of the products described herein.




Himalaya G12 Series 680-700W

132-cell Bifacial HJT Half Cell Solar Module

Engineering Drawings

Unit: mm

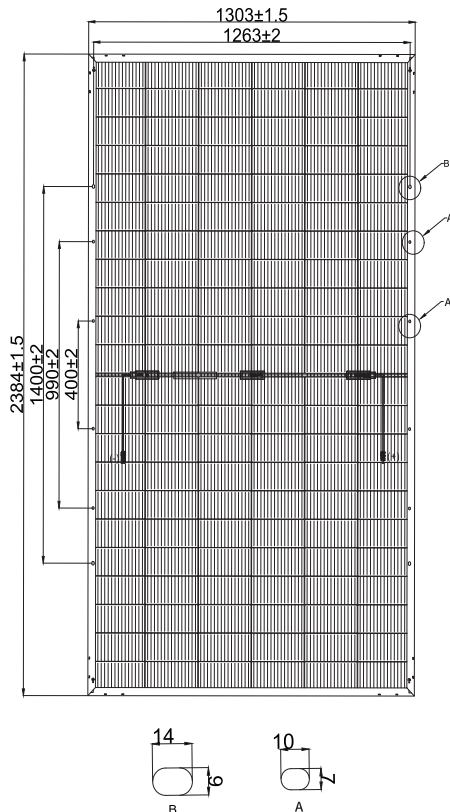

Electrical Characteristics (STC*)

HS-210-B132	DS680	DS685	DS690	DS695	DS700
Maximum Power (P _{max})	680W	685W	690W	695W	700W
Module Efficiency (%)	21.89%	22.05%	22.21%	22.37%	22.53%
Optimum Operating Voltage (V _{mp})	41.49V	41.65V	41.80V	41.95V	42.10V
Optimum Operating Current (I _{mp})	16.39A	16.45A	16.51A	16.57A	16.63A
Open Circuit Voltage (V _{oc})	49.50V	49.66V	49.82V	49.98V	50.13V
Short Circuit Current (I _{sc})	17.19A	17.25A	17.31A	17.37A	17.43A
Operating Module Temperature	-40 to +85 °C				
Maximum System Voltage	DC1500V (IEC)				
Maximum Series Fuse	30A				
Power Tolerance	0~+5W				
Bifaciality	80% ± 5%				

*STC: Irradiance 1000 W/m², cell temperature 25 °C, AM=1.5. Tolerance of P_{max} is within +/- 3%.

BSTC**

Maximum Power (P _{max})	750W	755W	760W	765W	770W
Optimum Operating Voltage (V _{mp})	41.49V	41.65V	41.80V	41.95V	42.10V
Optimum Operating Current (I _{mp})	18.08A	18.13A	18.19A	18.24A	18.29A
Open Circuit Voltage (V _{oc})	49.50V	49.66V	49.82V	49.98V	50.13V
Short Circuit Current (I _{sc})	18.96A	19.01A	19.07A	19.12A	19.17A

**BSTC: Front side irradiation 1000W/m², back side reflection irradiation 135W/m², AM=1.5, ambient temperature 25 °C.


Temperature Characteristics

Nominal Operating Cell Temp. (NOCT)	44 °C ± 2 °C
Temperature Coefficient of P _{max}	-0.26%/°C
Temperature Coefficient of V _{oc}	-0.24%/°C
Temperature Coefficient of I _{sc}	0.04%/°C

Safety & Warranty

Safety Class	Class II
Product Warranty	15 yrs Workmanship
Performance Warranty	30 yrs Linear Warranty*

* Less than 1% attenuation in the 1st year, the annual attenuation from the 2nd year is no more than 0.375%, and the power is no less than 88% until the 30th year.

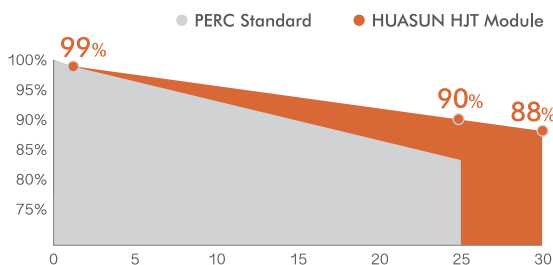

* Refer to HUASUN standard warranty for details

Mechanical Characteristics

Cell Type	HJT Mono 210 × 105mm
Cell Connection	132 (6 × 22)
Module Dimension	2384 × 1303 × 35 mm
Weight	38.7 kg
Junction Box	IP68
Output Cable	4mm ² , 300mm in length, length can be customized / UV resistant
Connectors Type	MC4 compatible
Frame	Anodised aluminum alloy
Encapsulant	EPE
Front Load	5400 Pa
Rear Load	2400 Pa
Glass Thickness	(F) 2.0mm anti-reflective surface solar glass (B) 2.0mm solar glass

Shipping Configurations

Container Size	HC
Pallets Per Container	40'
Modules Per Pallet (pcs)	18
Modules Per Container (pcs)	31
	558

ANHUI HUASUN ENERGY CO., LTD.

HUASUN-EN-2022-V2.0

© Anhui Huasun Energy Co., Ltd. reserves all rights.

NO.99 Qingliu Road, Economic and Technological Development Zone, Xuancheng, Anhui, China

Tel: 0086-563-2626509 www.huasunsolar.com

sales@huasunsolar.com customerservice@huasunsolar.com